


PROCEDURE REF# A-INL-030

Install high capacity gas tank

To install a high capacity gas tank, you'll need the tank and the following parts:

- 1) Support brackets (2)
- 2) Gas valve 3 way
- 3) Gas valve 2 way
- 4) 3 way gas valve bracket
- 5) Gas lines

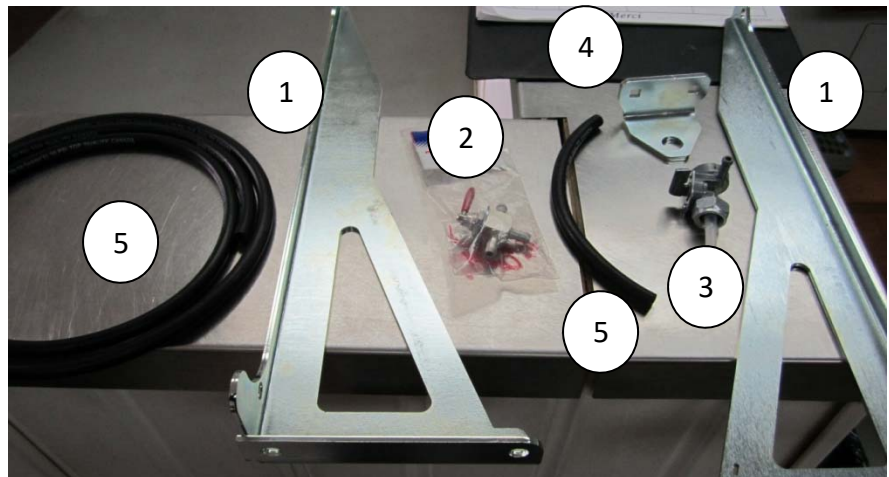

1- First step is to install the gas tank brackets on the frame. You may have to drill holes. On newer machines, holes will be there already. The tank must be installed on the back left side of the machine (see photo).





PROCEDURE REF# A-INL-030

Install high capacity gas tank

2- Install 2 way gas valve under the high capacity gas tank.



3- Install 3 way gas valve as close as possible of the Honda motor. You may have to drill holes to fix the bracket.



4- Install the hoses for the tank. When installing the long hose from the large tank bring it back around the back of the oil tank of the wrapper so that it is away from moving parts under the wrapper.

