

Installation of the 3 positions Joystick

Model : M90, M115, M140 and M160

Year : All


1- Remove the cap

- Unscrew the 2 bolts (allen) in the center of the valve and remove



2- Remove the spring

- Use a 5mm Allen wrench, remove the bolt in the center of the spring to remove it.

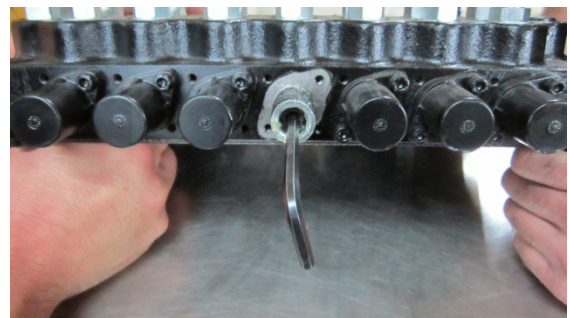

3- Install the new spring

- Install the new spring between the two rings.
- Replace the cap.



4- Install the arm (joystick)

- At the top of the valve (facing the machine), remove the lever on the right and the center small lever and install the joystick (3 pos) supplied by Anderson.
- Screw the small part of the joystick in place of the small central arm and tighten the nut.
- Replace the main arm (lever) in the sleeve and tighten the nut.
- The 3-position joystick is now ready to be used..

