


KNIVES POSITIONS


This is the basic configuration of the knives. If additional knives are installed, they must be installed starting from the bottom. Each additional knife must be installed in the entry position. The stroke limiter bolt or shear pin for the restrictor blade must be installed in the center position at all times. (see illustration on the right)




A520

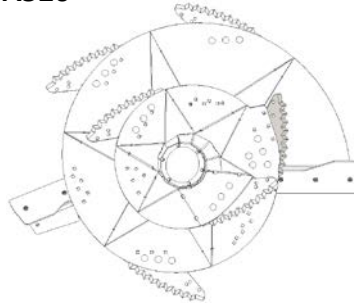


A950

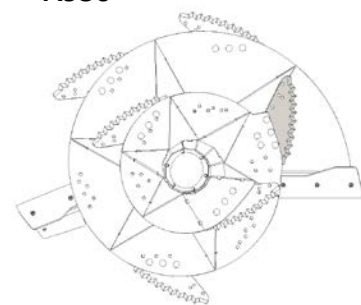


A280

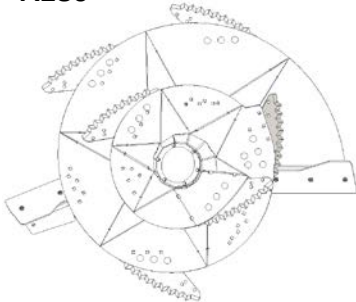


A520 + deported knife

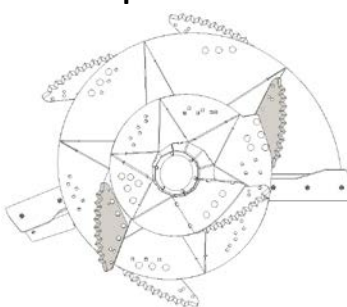


A950 + deported knife

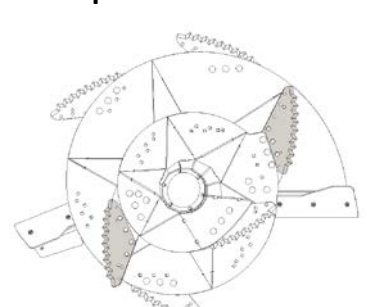


A380

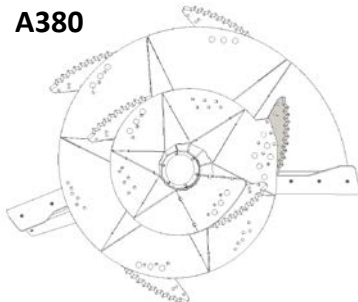


A700

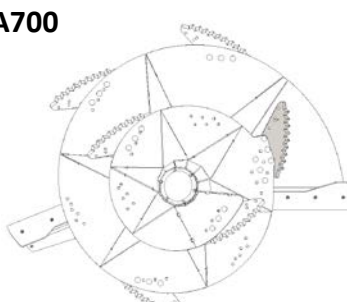


A920 et A1230

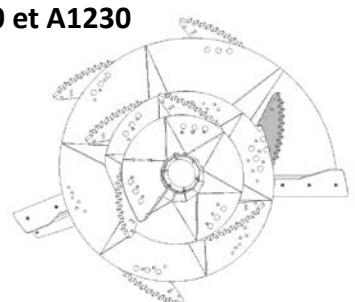

A450

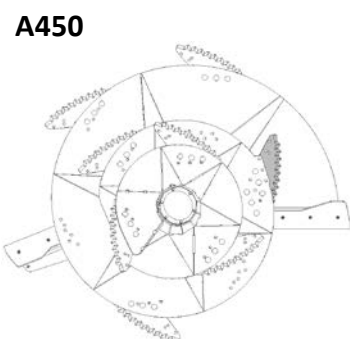

A700 + deported knife

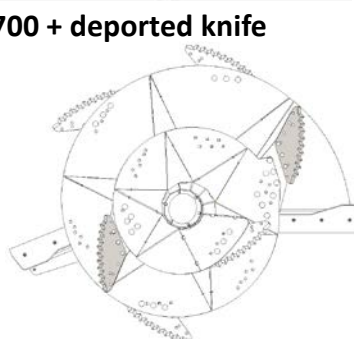

A920/A1230 + deported knife

